

RD 206T

Two-way loudspeaker system


RD 206T is a 6.5",coaxial, two-way, all-weather speaker, with waterproof, dustproof, windproof, anti-uv aging, specially designed dustproof and waterproof cover for input and output, has a pressing device, multi-layer different functional grille. The cabinet meets the IP56 standard. The exposed metal parts are made of stainless steel or aluminum, and the mounting bracket is sprayed with low-carbon steel, which can meet all-weather use (the version suitable for the marine environment can be customized, and the mounting bracket is upgraded to 316 stainless steel). Unit configuration: 1×6.5" ferrite mid-bass and 1×0.8" exit throat 25mm HF driver coaxial unit, the cabinet is made of polymer compound injection molding. RD 206T is equipped with transformer and band switch based on RD 206 to achieve a variety of different output powers including constant resistance.



FEATURES

- Pass IP56 testing, meet all-weather use
- The cabinet is made of polymer compound injection molding
- Coaxial point sound source
- Customized unit, better bass performance
- Applications: outdoor restaurants, bars, parks, near-filed sound reinforcement of scenic areas, houseboats and seashores (customized)

Overall dimensions

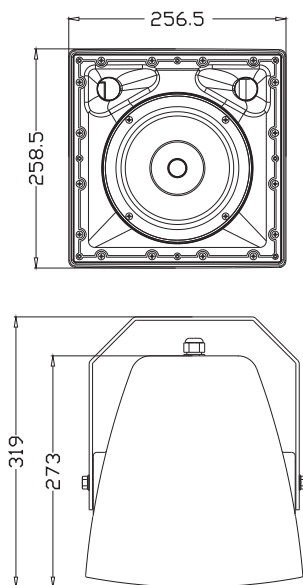

Technical specifications

FREQUENCY RESPONSE(-10dB)	100Hz-18kHz
DRIVERS	1×6.5 " (165mm)/1.4 " voice coil LF
	1×0.8 " (20mm) /1"voice coil HF
INPUT VOLTAGE	100V
POWER	25W/50W/100W/OFF/8Ω
SENSITIVITY	93 dB 1 watt/1 metre
MAXIMUM SPL	113 dB continuous, 119dB peak
IMPEDANCE	8 ohms nominal
DISPERSION(-6 dB)	100 ° ×100 °
CROSSOVER	2.8 kHz passive
DIMENSIONS	(W)256.5mm×(H)258.5mm×(D)319mm
WEIGHT	7kg

