

RD 208T

Two-way loudspeaker system

The RD 208T is a compact, 8" coaxial-driver, 2-way, highly weather-resistant, full range loudspeaker with high SPL, the body is made of engineering plastic injection molding. The system conforms to IP56 international standard. RD 208T is equipped with multi-tap transformer based on RD 208.

Features:


- ※ Highly weather-resistant IP56 rating
- ※ Engineering plastic injection molding
- ※ High SPL
- ※ Horn loaded design for coaxial components

Applications:

- ※ Sports facilities, stadiums, water parks
- ※ Outdoor background music, swimming pools
- ※ A wide variety of other outdoor venue types



Overall dimensions

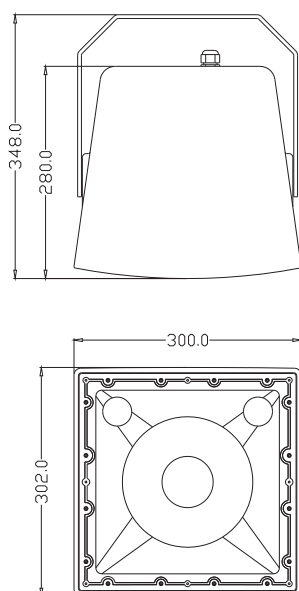

Technical specifications

FREQUENCY RESPONSE	80Hz-18kHz(-3dB)
DRIVERS	1×8" (200mm)/2" voice coil LF 1×1" (25mm)/1.4" voice coil HF
INPUT VOLTAGE	100V
POWER	37.5W/75W/150W/OFF/8Ω
SENSITIVITY	96 dB 1 watt/1 metre
MAXIMUM SPL	118 dB continuous, 124dB peak
IMPEDANCE	8 ohms nominal
DISPERSION(-6 dB)	100° × 100°
CROSSOVER	2.5 kHz passive
DIMENSIONS	(W)300mm×(H)302mm×(D)348mm
WEIGHT	11kg/pc

